

HETEROGENEOUS

GRABO
Ecosafe

HIGH PERFORMANCE SAFETY FLOOR COVERING

RECOMMENDED
USAGE

- > Wet areas
- > Ramps
- > Food prep areas
- > Anywhere safety floor is needed

2.0
mm

TOTAL THICKNESS

2.7
kg/m²

TOTAL WEIGHT

2
m

WIDTH OF ROLLS

34 43

EUROPEAN
CLASSIFICATION

PERFORMANCE, FEATURES & BENEFITS


Excellent slip resistance | Cost effective | Great color range
Dimensionally stable | Anti-bacterial | 10 year warranty

CONSTRUCTION

Easy Care wear layer

Glass fibre
reinforcement

PVC backing

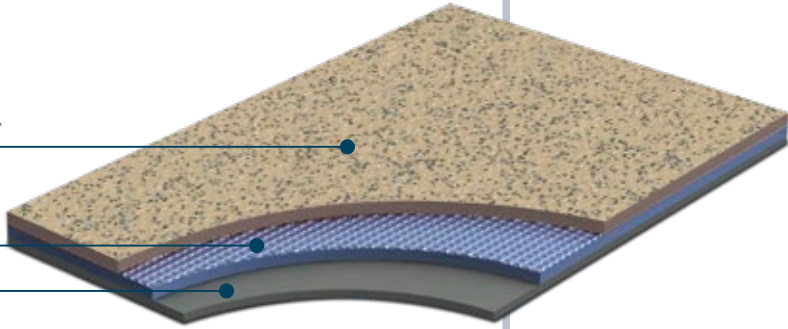

SPECIFICATIONS

DESCRIPTION

Construction	compact heterogeneous	
Total thickness	EN ISO 24346	2,0 mm
Wear layer thickness	EN ISO 24340	0,7 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,7 kg/m ²

CLASSIFICATION

European classification	EN 685	class: 34/43
-------------------------	--------	--------------

PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0,1 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	class: Bfl-s1
	DIN 4102/ÖNORM	class: B1
	ASTM E 648/662	class: Class1/pass
	Gost 30402-94	class: G1
Slip resistance	DIN 51130	R10
	ASTM D2047-99	dry: 0,92/wet: 0,84
	EN 13893	class: DS
	RRL Pendulum Test	>36 (wet test)
Abrasion resistance (H-18 wheel)	ASTM D3884-01	-0,19 g/1000 circle
Abrasion resistance	ISO 9352	-0,25 g/1000 circle
Chemical resistance	EN ISO 26987	✓
	ASTM F925-02	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment	Easy Care	
Anti bacterial and fungicid treatment	graboSAN	
Seaming method	hot or cold welding	
Warranty	10 year	



EASYCARE


SOLVENT
FREE
NO
WAX

grabo
SAN
minimize
the growth of
microorganisms




ECOSAFE


Ecosafe

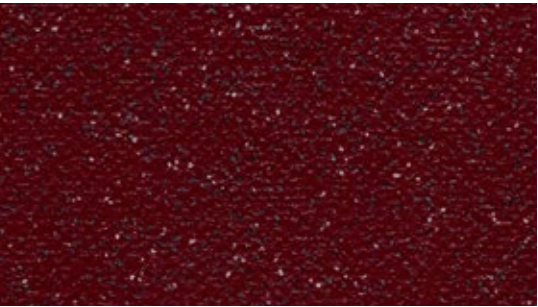


4740-20-279

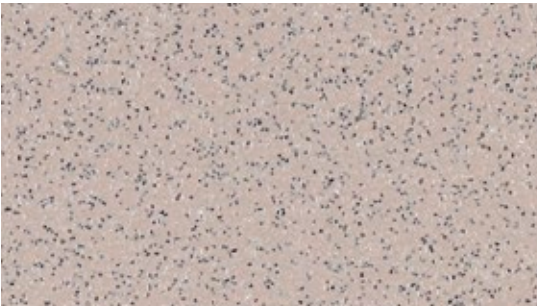

2942-20-279

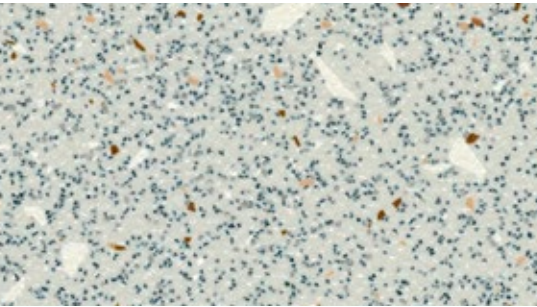


1017-664

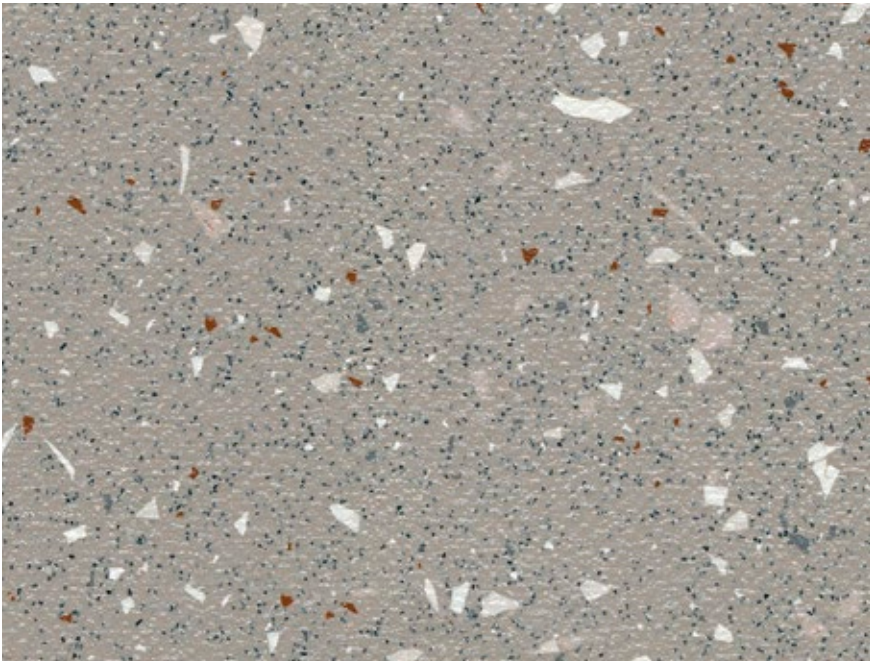


2954-659




2036-20-279

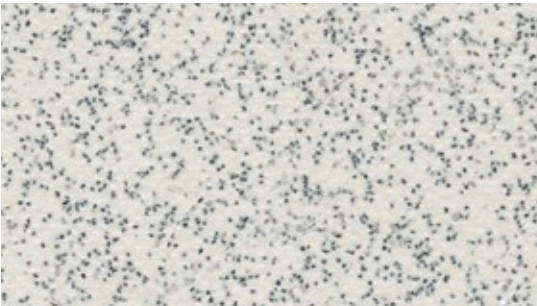


1137-20-279

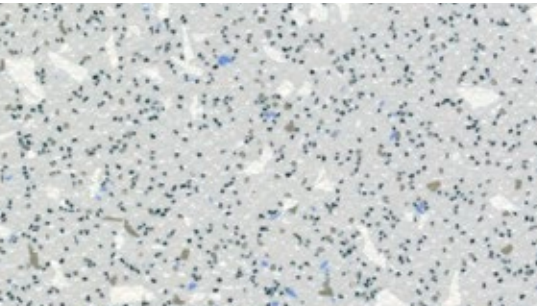


1204-663

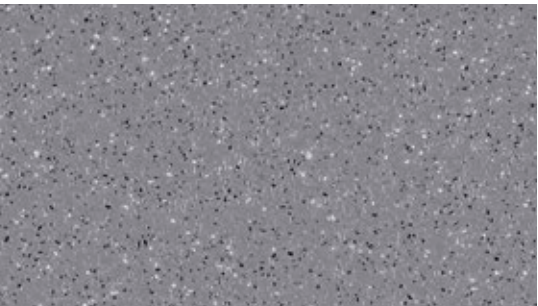


1260-20-279

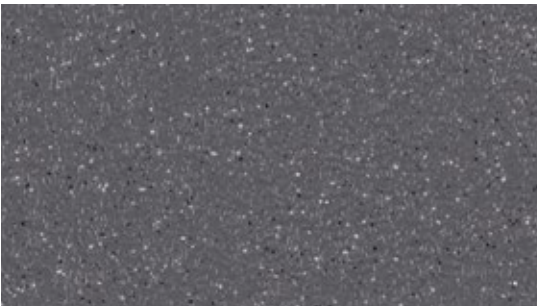


1424-20-279

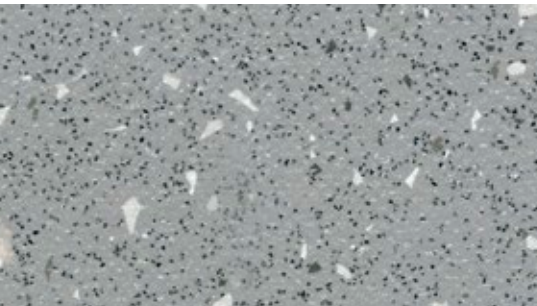


1341-662

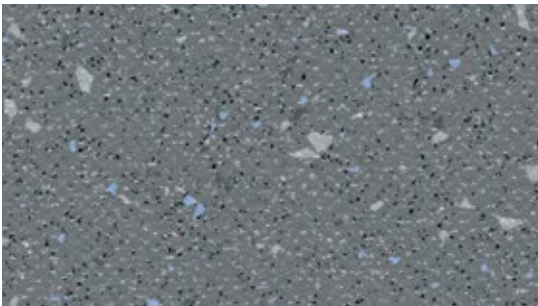


1396-660

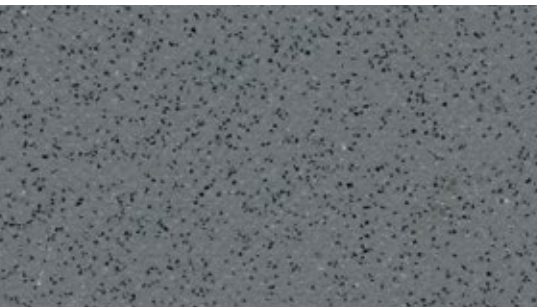

1173-20-279

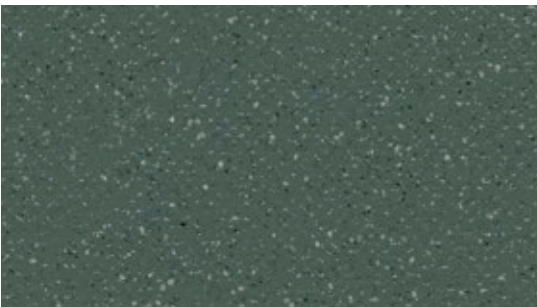


7093-20-279

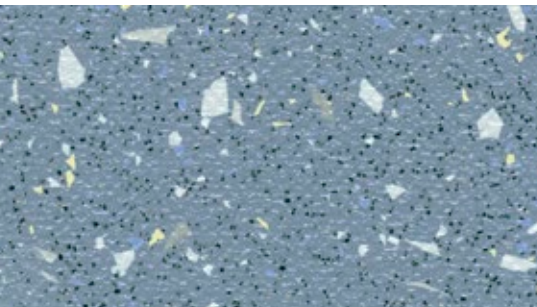


6123-661



6342-20-279

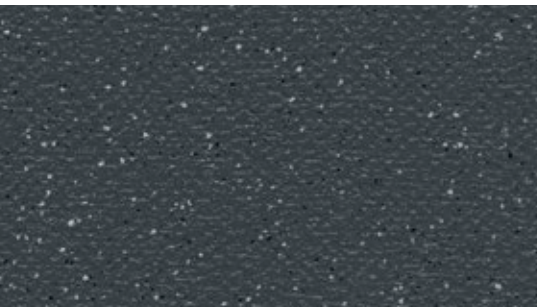


1387-20-279

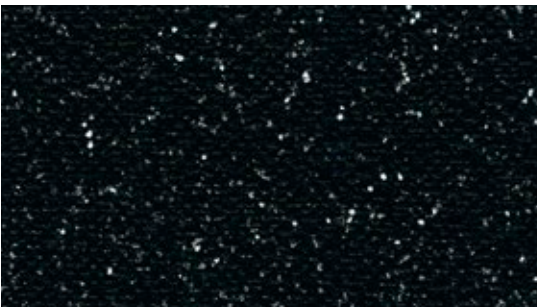

1991-20-279



6460-20-279

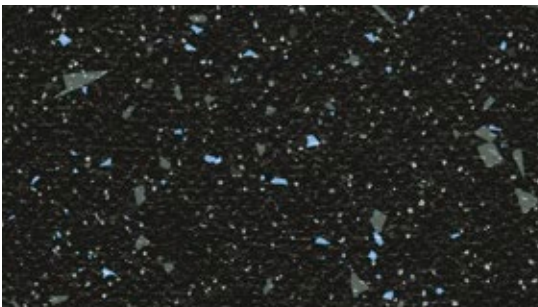

1991-666